

# HCMR150-2-DU

## Hybrid 2 channel VHF TX/RX Combiner + Duplexer


HCMR150-2-DU is a VHF TX/RX hybrid combiner / duplexer with single or dual isolators used for combining 2 VHF transceivers into one antenna with close frequency spacing.

- Standard EIA 19" tray, 500 mm depth (3HU).
- Tuned to customer specified frequencies, need to be specified when ordering.
- Full bandwidth.



## ELECTRICAL SPECIFICATIONS

Type	VHF TX/RX Hybrid Combiner + duplexer - 2 Channels
Frequency	144 - 160 MHz 160 - 175 MHz
VSWR	≤ 1.5:1
Impedance	50 Ohm
Max. Input Power	50 Watts (Per channel)
Insertion Loss (TX)	Single isolator: < 5.2 dB Dual isolator: < 5.5 dB
TX-TX spacing	DU-5: Max. 1.5 MHz DU-10: Max. 2.0 MHz
TX-RX spacing	DU-5: 4 - 7 MHz DU-10: 8 -12 MHz
Isolation RX-TX	TX-TX spacing <0.4 MHz :> 80dB TX-TX spacing (DU-5) <1.5 MHz :> 60dB TX-TX spacing (DU-10) <2.0 MHz :> 60dB
Isolation TX-RX	RX-RX spacing <0.4 MHz :> 80dB RX-RX spacing (DU-5) <1.5 MHz :> 60dB RX-RX spacing (DU-10) <2.0 MHz :> 60dB
Isolation TX - TX	Single: > 50 dB Dual: > 70 dB
Isolation RX-RX	> 20 dB
Bandwidth (RX)	RX-RX spacing (DU-5): Max. 1.5 MHz RX-RX spacing (DU-10): Max. 2.0 MHz
Gain	RX: 20±1.0 dB
LNA Noise Figure	< 2.0 dB
Power Supply	100-240 V; 50/60 Hz (Max. 7W)

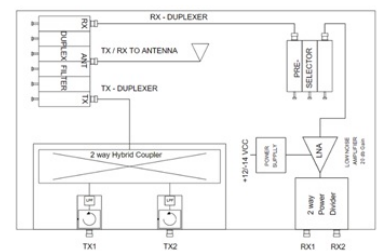

## Datasheet

2 / 2

## MECHANICAL SPECIFICATIONS

Color	Black Grey (RAL7021)
Dimension	482.6 x 133.5 x 500 mm (W x H x L)
Weight	Single isolator: 6.4 kg Dual isolator: 7.2 kg
Connector	Type N-female
Serial no.	On product label
Operating temperature	-20° to +60°C

## ORDERING INFORMATION

55122-013	HCMR150-2S-L-5 144-160 MHZ 2CH x 50 W Single Isolator + DU-5
55124-023	HCMR150-2S-L-10 144-160 MHZ 2CH x 50 W Single Isolator + DU-10
55122-033	HCMR150-2S-H-5 160-175 MHZ 2CH x 50 W Single Isolator + DU-5
55124-043	HCMR150-2S-H-10 160-175 MHZ 2CH x 50 W Single Isolator + DU-10
55122-053	HCMR150-2D-L-5 144-160 MHZ 2CH x 50 W Dual Isolator + DU-5
55124-063	HCMR150-2D-L-10 144-160 MHZ 2CH x 50 W Dual Isolator + DU-10
55122-073	HCMR150-2D-H-5 160-175 MHZ 2CH x 50 W Dual Isolator + DU-5
55124-083	HCMR150-2D-H-10 160-175 MHZ 2CH x 50 W Dual Isolator + DU-10