

Datasheet

1 / 2

E68 0 dB RIGID (M6)


Rigid full $1/4 \lambda$ antenna whip

Mobile factory-tuned flexible stainless steel antenna whip especially made for use with SX-Mount and Multimag on vehicle roof etc.

- FACTORY TUNED

ELECTRICAL SPECIFICATIONS

Frequency	68 MHz (4M-BAND)
Bandwidth	8 MHz
Impedance	50 ohm
Vswr	< 2.0
Polarisation	Vertical
Gain	0 dBd, 2.1 dBi
Max. Input Power	100 W

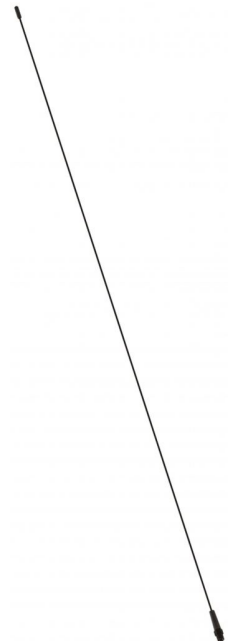

MECHANICAL SPECIFICATIONS

Color	Black
Height	Approx. 1110 mm
Weight	50 g
Mounting	On "E"-type mounts
Mounting Place	Vehicle roof
Materials	Stainless steel, PE and brass
Operating Temperature	-40C to +70C
Connector	M6 Internal thread

ORDERING INFORMATION

P/N	E12265
P/N	E12265IP (Bulk packing)

PACKAGING INFORMATION

Type	Polybag or bulk
------	-----------------

