Datasheet

VHF73N

3 dB VHF Fibreglass Antenna 1.26 m with N-female connector

- High quality VHF antenna with N-female connector
- Full 1/2 λ dipole antenna design
- Full omni-directional radiation pattern
- No groundplane needed

ELECTRICAL SPECIFICATIONS

Frequency	146 - 162.5 MHz (International Maritime VHF-band a.o.)
Bandwidth	16.5 MHz
Impedance	50 ohm
Vswr	<1.5
Polarisation	Vertical
Gain	3 dB (Marine), 0 dBd, 2.1 dBi
Max. Input Power	150 W
Antistatic Protection	Direct Ground



Datasheet

MECHANICAL SPECIFICATIONS

Color	White and chrome
Height	Approx. 1260 mm
Weight	375 g
Mounting	On 1" threaded pole (G1"-11 thread) with Revolving Nut Kit or on optionally brackets
Mounting Place	On mast or deck
Materials	PU-painted glassfibre, copper, PTFE and chrome plated solid brass
Survival Wind Speed	55 m/s (125 mph)
Operating	
Temperature	-55C to +70C (IEC 60068-2-1, IEC 60068-2-2)
Temperature Connector	-55C to +70C (IEC 60068-2-1, IEC 60068-2-2) N-female
Connector	N-female
Connector	N-female No cable supplied



ORDERING INFORMATION


P/N	11073-000N (Antenna only - bulk packing)
P/N	11073-001N (Antenna only - in Polybag)
P/N	11073-002N (Antenna only - in Carton tube)
P/N	11073-431N (Antenna + 1" Revolving Nut Kit - in Polybag)
P/N	11073-432N (Antenna + 1" Revolving Nut Kit - in Carton tube)
P/N	11073-514N (Antenna + Mast/Rail Mount - in Carton tube)

PACKAGING INFORMATION

Туре	Bulk packing or individually packing in Polybag or Carton tube (See "ORDERING INFORMATION")
Size	Approx. 1.5 m
Weight	Approx. 0.5 kg

Printed: 4/3/2025

Datasheet

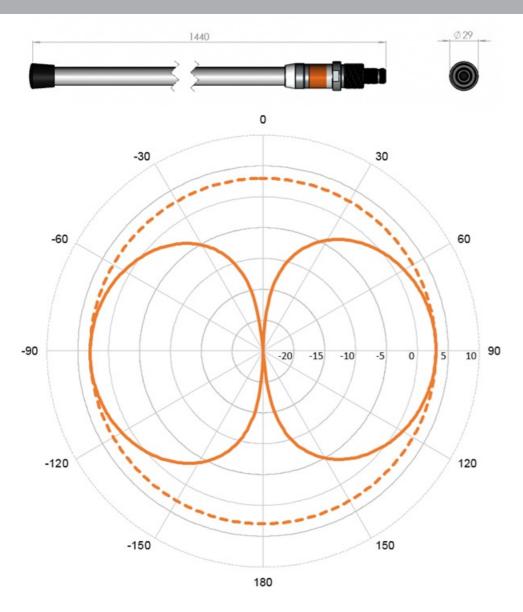

Datasheet

