


# ADJUSTABLE P05/01 MAST MOUNT


## Mounting Bracket with adjustable tilt

- Heavy duty bracket for installation of directional base station antennas on vertical pole
- For antenna boom diameter of  $\varnothing$  30 - 35 mm.
- The bracket is mounted vertically overhead or on side of poles  $\varnothing$  25 - 65 mm.
- Up to 50 degrees tilt
- Can be used for other antenna types, vertical and horizontal pole mounting
- Made from galvanized iron
- Stainless steel hardware included

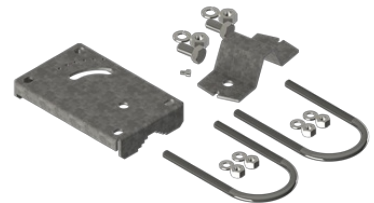

## MECHANICAL SPECIFICATIONS

Color	Silver
Mounting	On pole or rail with supplied U-bolts
Mounting place	On vertical pole or rail with diameter $\varnothing$ 25 - 65 mm.
Materials	Bracket: Galvanized Iron Hardware: Stainless Steel
For Antenna Types	Directional antennas, Yagi and Dipole Boom diameter of $\varnothing$ 30 - 35 mm
Dimension	150 x 95 x 26 mm
Weight	900 g (Mounting Hardware included)

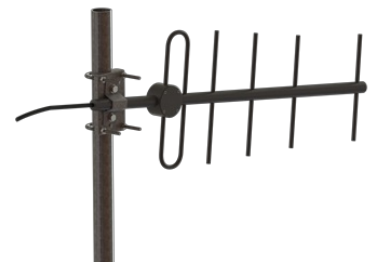

## ORDERING INFORMATION

P05-HERRAJE/01	Individually packing in Carton Box
----------------	------------------------------------

## PACKAGING INFORMATION

Type	Bulk packing or individually packing in Carton box (See "ORDERING INFORMATION")
Size	275 x 185 x 53 mm
Weight	1000 g

